

SGG PLANICLEAR®

A new standard in clear glass

SGG PLANICLEAR

Normal Clear Glass

SGG PLANICLEAR®

A new standard in clear glass

General description

For years, Saint-Gobain Glass proposed **sgg PLANILUX®** as high quality clear glass to its customers. Continuing its leadership, Saint-Gobain Glass now brings to its customers a new standard in clear glass: **sgg PLANICLEAR®**. This glass, with lower iron content, will be launched in September across Europe (all SGG Floats are normalized). Its improved aesthetics/optics brings true advantages on all segments of the market.

Performance comparison of uncoated products:

SGG PLANICLEAR®											
Thickness	mm	2	3	4	5	6	8	10	12	15	19
Visible Parameters											
TL	%	91	91	91	90	90	89	89	88	87	86
Energetic Parameters											
TE	%	89	88	87	86	85	83	81	79	77	73
AE	%	3	4	5	6	7	10	12	14	16	20
Solar Factor g		0,90	0,89	0,88	0,87	0,87	0,85	0,84	0,82	0,80	0,78

SGG PLANILUX®											
Thickness	mm	2	3	4	5	6	8	10	12	15	19
Visible Parameters											
TL	%	91	90	90	90	89	88	88	87	86	83
Energetic Parameters											
TE	%	88	86	85	83	82	79	76	72	69	62
AE	%	4	6	7	9	11	14	17	21	24	32
Solar Factor g		0,89	0,88	0,87	0,85	0,84	0,82	0,80	0,77	0,75	0,70

Residential

Windows provide for an energy balanced housing with better daylight and better aesthetics.



sgg PLANICLEAR® offers a new lever to match with the current and the future energy balanced houses. When combined with **sgg PLANITHERM®** product range, **sgg PLANICLEAR®** allows the windows to provide excellent thermal insulation (Ug) whilst improving solar heat gains (g) to reduce heating costs.



sgg PLANICLEAR® also contributes to push up the level of light transmission (LT) in windows to favor natural daylight resulting in increasing comfort while reducing artificial lighting needs.



The more neutral color of **sgg PLANICLEAR®** helps to better integrate windows in today houses. The view outside is more natural and the yellowish aspect from exterior is limited.



The table below illustrates the Glazing performances for typical configurations with **sgg PLANICLEAR®** as glass panes:

Composition (mm)		4-16-4	4-16-4	4-14-4-14-4
External Pane		sgg PLANICLEAR®	sgg PLANICLEAR®	sgg PLANICLEAR®
Central Pane				sgg PLANITHERM® XN
Internal Pane		sgg PLANITHERM® XN	sgg PLANITHERM® Total +	sgg PLANITHERM® XN
Luminous Factors	TL	82%	81%	74%
	RL Text	12%	12%	16%
Solar Factors	g	0,65	0,73	0,56
Coef. Ug (Ar 90%)	W/(m².k)	1,1	1,2	0,6

Values calculated according to EN410-2011 & EN673-2011 standards with 90% argon gas filling.

Façade

For many years there is a clear trend in design of commercial façades for transparency, clarity and more neutral colored glazing solutions.

Saint-Gobain Glass is paying tribute to this increasing market demand for a clearer substrate in making the new **sgg PLANICLEAR®** the standard substrate for high selective, high performance and all classic solar control coatings such as **sgg COOL-LITE® XTREME**, **SKN**, **KNT** and **ST** ranges or **sgg ANTELIO**.

The clear advantages coming with this new clear substrate are obvious: more daylight, more neutral colors and reduced absorption.

Interior

Improved transparency

With higher light transmission than traditional glass, **sgg PLANICLEAR®** helps creating bright interiors, especially when glass is used as a partition. The high clarity of **sgg PLANICLEAR®** is very noticeable in thick applications – whether monolithic or laminated: partitions, interior doors, shower enclosures, shop windows, etc.



A slightly bluish tint

Its very slightly bluish tint highlights the visible decorative elements on board: table tops, shelves or counters for example.



Better colour rendering

Its increased transmission neutrality offers good colour rendering, which is highly valued for creating shop windows (commerce, museography, furniture, etc.).

sgg PLANICLEAR® is ideal for applying lacquers, enamels, or designs in white and pastel colours, as it will not distort the colours.



Product Range

sgg PLANICLEAR® is available and in stock from September 2014:

- Jumbo size (PLF) 6 000 x 3 210 mm, DLF 2250 x 3210 mm, DLF 2000 x 3210 mm
- Thicknesses: 2.9 / 3.9 / 5.9 / 8 / 10 / 12 / 15 / 19 mm
- All transformed product range available (coated, laminated, sandblasted, tempered, etc.)


Characteristics and performances of SGG product range with **sgg PLANICLEAR®** are available with CALUMEN II (certified software) version 1.2.9

Certification & CE Marking

Certification of SGG product range with **sgg PLANICLEAR®** by IFT Rosenheim and UBAtc.

DoP can be downloaded from CE marking website after Sept 1st: <http://www.saint-gobain-glass.com/ce>

Your personal contact

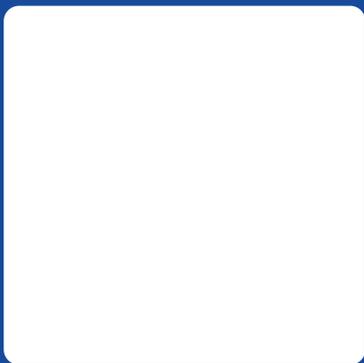

A strong relationship with



SAINT-GOBAIN GLASS – EXPROVER

A SGGF business unit

Les Miroirs

18 avenue d'Alsace

92 400 Courbevoie

France

www.exprover.saint-gobain-glass.com

info@exprover.com